DIECI AUSTRALIA

CONSTRUCTION & MINING














FIXED BOOM TELEHANDLERS



MODEL	APOLLO SMART 20.4	APOLLO 25.6	DEDALUS 30.7 TCL	DEDALUS 30.9 TCL	ZEUS 33.11
Max capacity	2,000 kg	2,500 kg	3,000 kg	3,000 kg	3,300 kg
Max lift height	4.35 m	5.73 m	6.35 m	8.70 m	10.60 m
Max horizontal extension	2.67 m	3.30 m	3.70 m	5.80 m	7.45 m
Max speed	25 km/h	30 km/h	35 km/h	35 km/h	40 km/h
Engine	Kubota	Kubota	Kubota	Kubota	FPT
Nominal power	50 hp (37kW)	74 hp (55.4 kW)	98 hp (73.4 kW)	98 hp (73.4 kW)	125 hp (93 kW)
Emission standard	Stage V	Stage IIIA/Tier 3	Stage IIIA/Tier 3	Stage IIIA/Tier 3	Stage IIIA/Tier 3
Transmission	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Unladen weight	4,300 kg	5,100 kg	6,100 kg	6,250 kg	8,200 kg
Length	3,534 mm	4,100 mm	4,765 mm	4,775 mm	5,300 mm
Width	1,550 mm	1,860 mm	2,000 mm	2,000 mm	2,290 mm
Height	1,929 mm	1,955 mm	2,040 mm	2,040 mm	2,360 mm
Tyres	12x16.5″	12x16.5″	12.5x18″	12.5x18″	400/70x24″



MODEL	ZEUS 35.10 GD	ZEUS 38.10 GD	ZEUS 40.7	RUNNER 40.13	ICARUS 45.17 GD
Max capacity	3,500 kg	3,800 kg	4,000 kg	4,000 kg	4,500 kg
Max lift height	9.60 m	9.60 m	7.00 m	12.40 m	16.40 m
Max horizontal extension	6.20 m	6.20 m	4.00 m	8.85 m	12.60 m
Max speed	38 km/h	38 km/h	40 km/h	32 km/h	35 km/h
Engine	FPT	FPT	FPT	FPT	FPT
Nominal power	125 hp (93 kW)	125 hp (93 kW)	125 hp (93 kW)	125 hp (93 kW)	125 hp (93 kW)
Emission standard	Stage IIIA/Tier 3	Stage IIIA/Tier 3	Stage IIIA/Tier 3	Stage IIIA/Tier 3	Stage IIIA/Tier 3
Transmission	Hydrostatic	Hydrostatic	Power shift	Hydrostatic	Hydrostatic
Unladen weight	8,300 kg	8,300 kg	7,700 kg	10,420 kg	11,400 kg
Length	5,050 mm	5,050 mm	5,075 mm	5,590 mm	6,260 mm
Width	2,290 mm	2,290 mm	2,310 mm	2,320 mm	2,390 mm
Height	2,410 mm	2,410 mm	2,445 mm	2,460 mm	2,530 mm
Tyres	405/70x24″	405/70x24″	460/70x24″	400/70x20″	405/70x24″



MODEL	SAMSON 72.10 GD	HERCULES 130.10	HERCULES 190.10	HERCULES 210.10	HERCULES 230.10
Max capacity	7,200 kg	13,000 kg	19,000 kg	21,000 kg	23,000 kg
Max lift height	9.50 m	9.50 m	10.20 m	10.20 m	10.20 m
Max horizontal extension	5.40 m	5.1 m	5.92 m	5.92 m	5.90 m
Max speed	40 km/h	34 km/h	23 km/h	23 km/h	23 km/h
Engine	FPT	FPT	FPT	FPT	FPT
Nominal power	125 hp (93 kW)	168 hp (125 kW)	173 hp (129 kW)	173 hp (129 kW)	173 hp (129 kW)
Emission standard	Stage IIIA/Tier 3	Stage V	Stage IIIA/Tier 3	Stage IIIA/Tier 3	Stage IIIA/Tier 3
Transmission	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Unladen weight	12,600 kg	18,000 kg	24,500 kg	27,500 kg	29,000 kg
Length	5,910 mm	6,050 mm	6,800 mm	6,800 mm	6,800 mm
Width	2,390 mm	2,420 mm	2,600 mm	2,700 mm	2,880 mm
Height	2,640 mm	2,890 mm	2,930 mm	2,930 mm	2,980 mm
Tyres	18x22.5″	17.5x25″	20.5x25″	23.5x25″	26.5x25″

ROTATIONAL TELEHANDLERS



MODEL	PEGASUS 40.18 400°	PEGASUS 50.21 360°	PEGASUS 60.21 360°	PEGASUS 70.35 360°	PEGASUS 75.25 360°
Max capacity	4,000 kg	5,000 kg	6,000 kg	7,000 kg	7,500 kg
Max lift height	18.00 m	20.50 m	20.50 m	34.50 m	24.50 m
Max horizontal extension	15.30 m	18.00 m	18.10 m	27.50 m	20.70 m
Max speed	25 km/h	40 km/h	40 km/h	40 km/h	40 km/h
Engine	Kubota	FPT	Perkins	FPT	FPT
Nominal power	98 hp (73.4 kW)	139 hp (104 kW)	134 hp (100kW)	197 hp (147 kW)	168 hp (125 kW)
Emission standard	Stage IIIA/Tier 3	Stage IIIA/Tier 3	Stage V	Stage V	Stage V
Transmission	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Unladen weight	13,700 kg	17,540 kg	17,700 kg	24,000 kg	21,550 kg
Length	6,630 mm	7,150 mm	7,150 mm	9,200 mm	8,100 mm
Width	2,380 mm	2,380 mm	2,380 mm	2,480 mm	2,500mm
Height	3,035 mm	3,020 mm	3,030 mm	3,300 mm	3,095 mm
Tyres	400/70x20″	18Rx22.5″	18Rx22.5″	17.5x25″	18R22.5″

ELECTRIC TELEHANDLERS



MODEL	APOLLO-E 26.6
Max capacity	2,600 kg
Max lift height	5.73 m
Max horizontal extension	3.30 m
Max speed	24 km/h
Motor	96V Electric
Traction motor power	25 hp (19 kW)
Hydraulic motor power	29.5 hp (22 kW)
Transmission	Single speed electric
Unladen weight	5,100 kg
Length	4,100 mm
Width	1,860 mm
Height	1,980 mm
Tyres	12x75-18

MIXER TRUCKS



MODEL	L4700 T	F7000 T
Concrete yield	3.5 m^3	5 m^3
Water tank	630 l	850 l
Max speed	24 km/h	27 km/h
Engine	FPT	FPT
Nominal power	99 hp (74 kW)	125 hp (93 kW)
Emission standard	Stage IIIA/Tier 3	Stage IIIA/Tier 3
Transmission	Hydrostatic	Hydrostatic
Unladen weight	6,800 kg	7,400 kg
Length	5,290 mm	6,100 mm
Width	2,400 mm	2,370 mm
Height	3,140 mm	3,080 mm
Tyres	405/70x20″	405/70x24″
Self-Loader	Optional	Optional

DUMP TRUCKS



MODEL	DP4200	DP7000
Max capacity	8,000 kg	12,000 kg
Caisson capacity	5.3 m^3	7.5 m^3
Max speed	27 km/h	27 km/h
Engine	FPT	FPT
Nominal power	99 hp (74 kW)	125 hp (93 kW)
Emission standard	Stage IIIA/Tier 3	Stage IIIA/Tier 3
Transmission	Hydrostatic	Hydrostatic
Unladen weight	5,000 kg	6,800 kg
Length	4,960 mm	5,820 mm
Width	2,350 mm	2,330 mm
Height	3,010 mm	3,045 mm
Tyres	405/70x20″	405/70x24″

WATER CARTS



MODEL	WC10000
Water tank capacity	10,000 Ltr
Water pump capacity	1,600 l/pm
Water pump engine	Yanmar, 10hp, diesel
Control system	Remote
Nominal power	99 hp (74 kW)
Spray system	1 x 3″ and 2 x 1.5″ spray heads
Filling	Hydrant or suction
Unladen weight	7,050 kg
Length	6,880 mm
Width	2.400 mm
Height	3,290 mm
Tyres	405/70x20″

* Also available as a bare cab chassis

NEW SOUTH WALES

Sydney Branch

1/5 Melito Court,
Prestons, NSW 2170

WESTERN AUSTRALIA

Perth Branch

32 Allott Way,
Maddington, WA 6109

VICTORIA


Melbourne Branch

169 Studley Court,
Derrimut, VIC 3026

QUEENSLAND

Brisbane Branch

1/7 Australand Drive,
Berrinba, QLD 4117

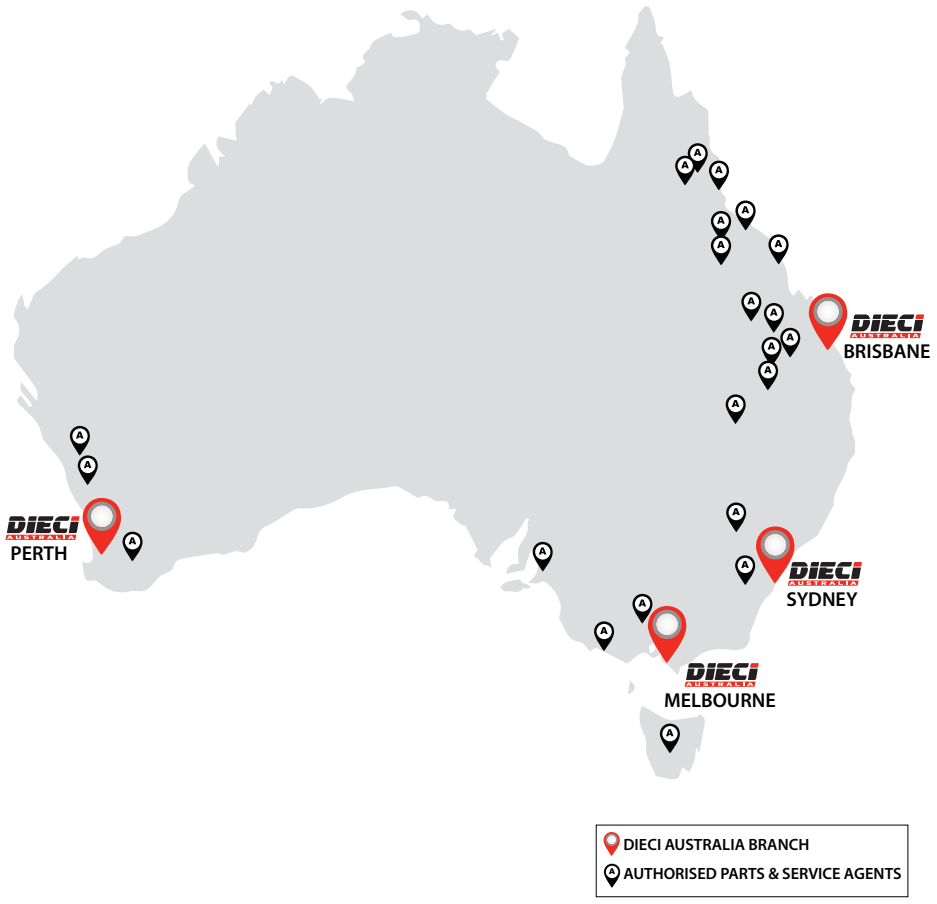

www.dieciaustralia.com.au | ph: 1300 888 479 | sales@dieciaustralia.com.au

Distributed by Dieci Australia

Illustrations and photos show the standard international models and may or may not include optional equipment, accessories, customer installed or modified parts, optional parts and all standard equipment with some differences in colour and features. Machine specifications are subject to change without notice and additional load charts and machine or attachment specifications may be available on request. Please refer to the user and maintenance manuals located on Dieci Australia's website for correct machine and attachment operation.

Printed in Australia

ConstructionRange_1126